

Product data sheet

Specifications



discrete input module Modicon Quantum - 16 I - 230 V AC

140DAI74000

! To be discontinued on: 31 December 2022

! To be end-of-service on: 31 December 2030

! To be discontinued

Main

Range of product	Modicon Quantum automation platform
Product or component type	VAC discrete input modules
Software name	Concept ProWORX 32 Unity Pro
Discrete input number	16

Complementary

Group of channels	16
Addressing requirement	1 input word
Discrete input voltage	230 V AC
Input current	11.5 mA at 57...63 Hz 9.7 mA at 47...53 Hz
Voltage state 1 guaranteed	165...264 V AC at 57...63 Hz 175...264 V AC at 47...53 Hz
Voltage state 0 guaranteed	0...40 V AC at 57...63 Hz 0...40 V AC at 47...53 Hz
Input impedance	26500 Ohm capacitive at 57...63 Hz 31800 Ohm capacitive at 47...53 Hz
Network frequency limits	47...63 Hz
Maximum leakage current	2.6 mA
Absolute maximum input	264 V continuous 300 V 10 s 400 V 1 cycle
Response time	4.9...0.75 ms x line cycle Off-On 7.3...12.3 ms On-Off
Isolation between channels	1780 Vrms for 1 minute
Isolation between channels and bus	1780 Vrms for 1 minute
Bus current requirement	180 mA
Maximum power dissipation in W	5.5 W
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault detected (F) 16 LEDs (green) for input status

Marking	CE
Module format	Standard
Net weight	0.35 kg

Environment

Standards	UL 508 CSA C22.2 No 142
Product certifications	FM Class 1 Division 2 cUL
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	450 g
Package 1 Height	163 mm
Package 1 width	45 mm
Package 1 Length	312 mm
Unit Type of Package 2	S03
Number of Units in Package 2	7
Package 2 Weight	3.724 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

California proposition 65


WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
-----------------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

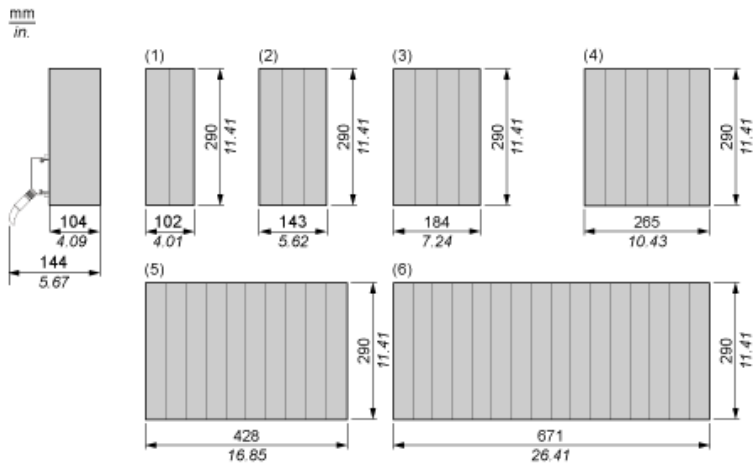

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

230 Vac Discrete Input Module

Wiring Diagram

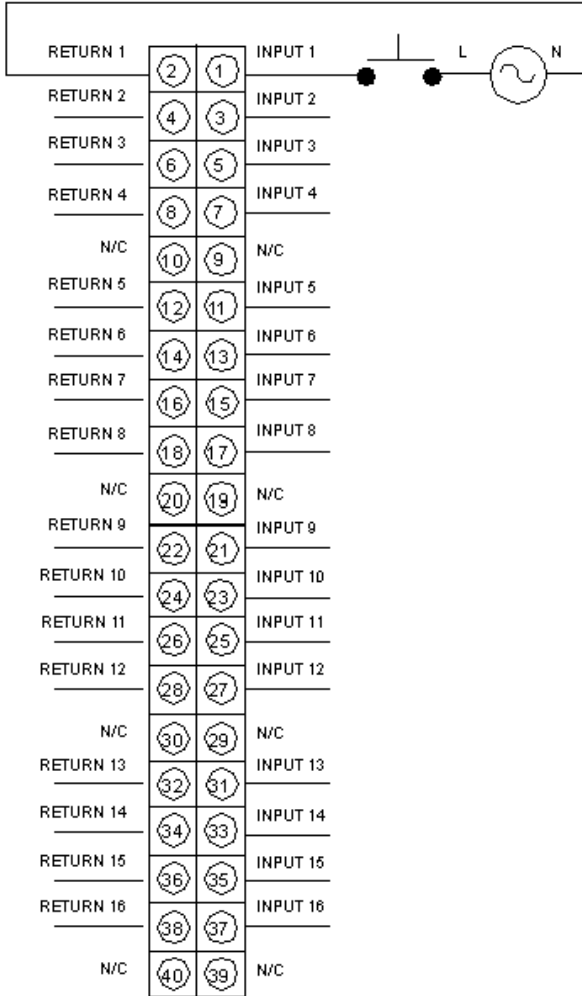

N/C Not Connected

Recommended replacement(s)

140DAI74000 is replaced by:

1x



discrete input X80 - 16 channel isolated supervised - 200..240 V AC
BMXDAI1615